

# Premium Wash Down Concentrate

- 1. Introduction** ALEXSEAL Premium Wash Down Concentrate is a biodegradable washing detergent designed to clean ALEXSEAL Topcoats from usual dirt in the marine environment (like water marks and salt residues). It is neutral in PH; does not include abrasives and is rinseable without residues which decrease drying time. ALEXSEAL Premium Wash Down Concentrate is formulated for the marine environment and fulfills all environmental requirements for marine detergents.
- 2. Range of application** ALEXSEAL Premium Wash Down Concentrate can be used on ALEXSEAL Topcoats.
- 3. Color** Dark blue, slightly viscous liquid
- 4. Coverage** N.A.
- 5. Substrate pre-treatment** The substrate must be rinsed thoroughly with clean fresh/filtered water prior to washing the surface with the ALEXSEAL Premium Wash Down.
- 6. Trade names** Base Material                      A5005                      ALEXSEAL Premium Wash Down Concentrate
- 7. Mixing ratio** 1 ounce (30 ml) of ALEXSEAL Premium Wash Down Concentrate per gallon (3.785 LT) of water.
- 8. Application**  
Application by soft cotton towel:
1. Thoroughly rinse the surface with water prior to washing. The use of filtered water is recommended.
  2. Add 1 ounce (30 ml) of ALEXSEAL Premium Wash Down Concentrate per gallon (3.785 LT) of water. The mixture results in ALEXSEAL Premium Wash Down.
  3. Use only soft, clean wash mitts and brushes that are specifically designed for washing painted surfaces. Make certain the surface stays wet from initial rinsing. Do not allow the surface to dry prior to final rinsing. Wash only small areas of large areas to insure the surface stays wet. Do not use the ALEXSEAL Premium Wash Down Concentrate in direct sunshine.
  4. Rinse the surface thoroughly after washing.
  5. Wherever possible, dry the surface to prevent water spots with a quality towel, chamois and/or a wiping blade.
- NOTE:**  
Rinse down the painted surface with clean fresh water every time the boat was used to remove salt spray and dirt. A water softener may be needed to overcome hard water spots. A buildup of hard water spotting can be confused with premature dulling of paint. A reverse osmosis water supply may also be used to minimize water spotting.
- If water beads are allowed to air dry, the water evaporates and leaves a residue on the paint. If this residue is not removed it may gradually etch the paint.
- Difficult to remove stains may require a higher concentration of ALEXSEAL Premium Wash Down Concentrate. High concentrations will require increased amounts of rinsing. Some stains may require ALEXSEAL Premium Wash Down Concentrate to be used at full concentration.
- Difficult to remove stains may even require a more intense cleaning procedure and a stronger washing agent.
- 9. Storage and Shelf Life** Do not freeze.

**Professional Use Only**

**Page 1 of 2**

The information contained in this data sheet is based on our level of research and development. Revisal by the user with regard to the intended aim is necessary due to the diverse processing and application possibilities. Any liability on part of Mankiewicz for faulty applications and / or improper use is expressly excluded. The processing of the product must be fully documented by means of a paint application protocol.

Revision 01/23

# Premium Wash Down Concentrate

If the original unopened ALEXSEAL Premium Wash Down Concentrate is stored in a cool and dry place the product has a shelf life of 24 months after production.

## 10. Packaging


A5005                      ALEXSEAL Premium Wash Down Concentrate                      1 Qt & 1.25 Gal

It is possible to refill the 1 Qt can with the larger 1.25 Gal container:

Open the cap and push down the valve on the inside of the bottleneck (picture 1). You may use a pen or screwdriver for example. Push down the valve until it clicks and stays in the position (picture 2). Now you can refill the can with new ALEXSEAL Premium Wash Down Concentrate. By closing the cap the valve will come up again and you can use the can as before.



Picture 1

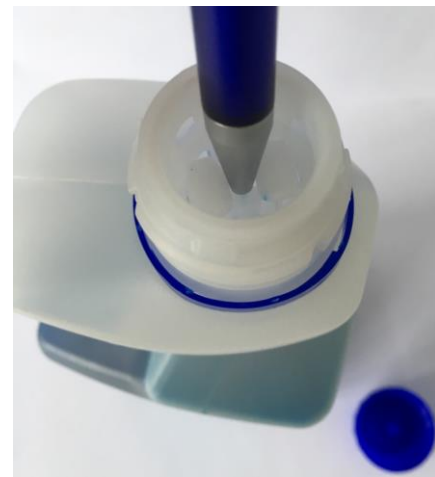

Picture 2

**WARNING:** Keep out of reach of children, avoid contact with eyes. If so, flush eyes liberally with water.

**FIRST AID:** Get medical attention if swallowed.

**Professional Use Only**

**Page 2 of 2**

The information contained in this data sheet is based on our level of research and development. Revisal by the user with regard to the intended aim is necessary due to the diverse processing and application possibilities. Any liability on part of Mankiewicz for faulty applications and / or improper use is expressly excluded. The processing of the product must be fully documented by means of a paint application protocol.

Revision 01/23