

UL-489 Circuit Breakers

Expanded line of circuit breakers that meet CFR 46 / CoastGuard requirements

Part #	7440-7446	7454-7459	7461-7467
Interrupting Capacity	10,000A	5,000A	5,000A
Voltage Max. Operating	80V DC	240V AC	240V AC
Temperature Operating	-40°C to 85°C (-40°F-185°F)	-40°C to 85°C (-40°F-185°F)	-40°C to 85°C (-40°F-185°F)
Type	C-Series, Magnetic Hydraulic - Trip free	C-Series, Magnetic Hydraulic - Trip free	C-Series, Magnetic Hydraulic - Trip free
Terminal	#10-32 Screw* Tin-Plated Brass	#10-32 Screw Tin-Plated Brass	1/4"-20 Stud Tin-Plated Brass
Terminal Torque	15-20 in-lb*	15-20 in-lb	35 in-lb
Mounting Screw	#6-32 SS	#6-32 SS	#6-32 SS
Mounting Screw Torque	7-9 in-lb	7-9 in-lb	7-9 in-lb
Regulatory	UL 489, CSA certified, TUV certified		

* 7446 - Terminal - 1/4"-20 Stud, Terminal Torque - 30-35 in-lb

Part #	Amps	Poles	Actuator Style	Part #	Amps	Poles	Actuator Style
7440	5A DC	1	Flat Rocker	7461	10A AC	2	Flat Rocker
7441	10A DC	1	Flat Rocker	7462	15A AC	2	Flat Rocker
7442	15A DC	1	Flat Rocker	7463	20A AC	2	Flat Rocker
7443	20A DC	1	Flat Rocker	7464	25A AC	2	Flat Rocker
7444	30A DC	1	Flat Rocker	7465	30A AC	2	Flat Rocker
7445	50A DC	1	Flat Rocker	7466	30A AC	2	Raised Rocker
7446	100A DC	1	Flat Rocker	7467	50A AC	2	Raised Rocker

Part #	Amps	Poles	Actuator Style
7454	5A AC	1	Flat Rocker
7455	10A AC	1	Flat Rocker
7456	15A AC	1	Flat Rocker
7457	20A AC	1	Flat Rocker
7458	30A AC	1	Flat Rocker
7459	50A AC	1	Flat Rocker

Related Products



SMS Panel Enclosures page 88



7440






7454




7464



7466

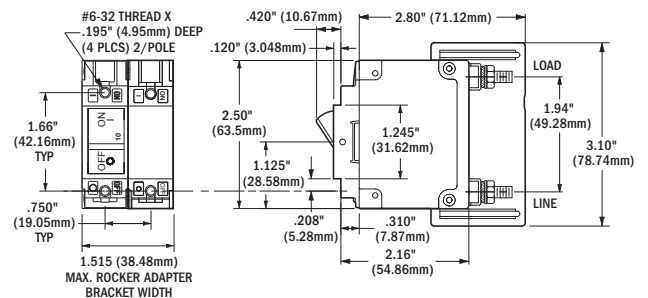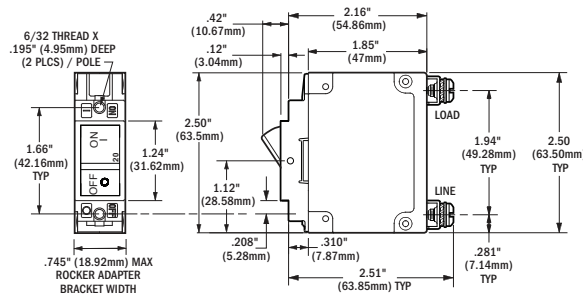

PANEL CUTOUT DETAIL



PANEL CUTOUT DETAIL