


SeaLand® Tank Flange Kit Installation Instructions



1. Use template to mark holes.
2. Cut large hole using a 4-1/8" (105 mm) hole saw or saber saw.
3. Drill five holes using a 0.265" (7 mm) diameter drill bit.
4. Install flange and gasket using the five screws, washers and nuts provided.

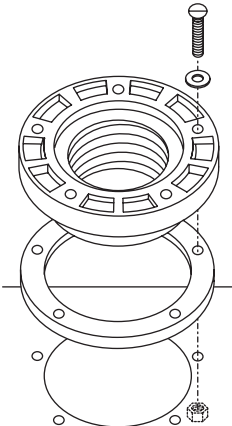

Dometic Corporation
13128 State Rt 226
PO Box 38
Big Prairie, OH 44611
1-800-321-9886