


Claw Anchor

Selection guide

	ANCHOR WEIGHT		BOAT LENGTH OVERALL									
	kg	lb	6 m 20 ft	9.2 m 30 ft	12.2 m 40 ft	15.2 m 50 ft	18.3 m 60 ft	21.3 m 70 ft	24.4 m 80 ft	27.4 m 90 ft		
Claw	1	2.2										
Claw	2	4.4										
Claw	5	11										
Claw	7.5	16.5										
Claw	10	22										
Claw	15	33										
Claw	20	44										
Claw	30	66										
Claw	50	110										
Claw	80	176										

Lighter shading represents the upper limit of model. If in doubt, move up a model.
This information is for guidance only, please consult the relevant Classification Society for specific certification requirements.

Dimensions Diagram

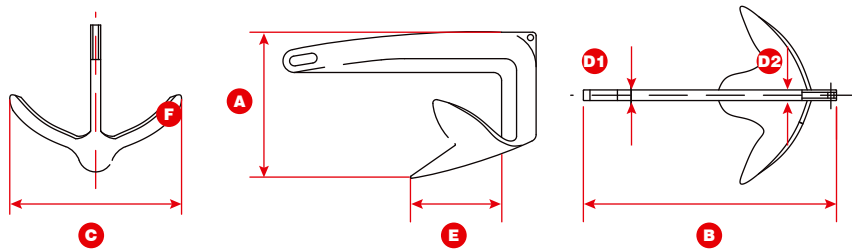

Claw Anchor Galvanised Specifications

GALVANIZED Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D1		E	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0057901	1	2.2	5	3/16	133 ± 8	5 1/4	295 ± 4	11 5/8	182 ± 8	7 3/16	7.5 ± 2	5/16	95 ± 6	3 3/4
0057902	2	4.4	5	3/16	182 ± 8	7 3/16	361 ± 4	14 3/16	240 ± 8	9 7/16	9 ± 2	3/8	123 ± 6	4 13/16
0057905	5	11	5	3/16	227 ± 10	8 15/16	468 ± 5	18 7/16	295 ± 8	11 5/8	12 ± 3	1/2	150 ± 6	5 7/8
0057907	7.5	16.5	6	1/4	263 ± 10	10 3/8	499 ± 5	19 5/8	324 ± 10	12 3/4	15 ± 3	9/16	151 ± 8	5 15/16
0057910	10	22	8	5/16	282 ± 10	11 1/8	540 ± 6	21 1/4	360 ± 10	14 3/16	15 ± 4	9/16	182 ± 8	7 3/16
0057915	15	33	8	5/16	342 ± 12	13 7/16	630 ± 6	24 13/16	435 ± 10	17 1/8	16.5 ± 4	10/16	206 ± 12	8 1/8
0057920	20	44	10	3/8	343 ± 12	13 1/2	703 ± 8	27 11/16	452 ± 12	17 13/16	25 ± 5	1	238 ± 12	9 3/8
0057930	30	66	10	3/8	397 ± 12	15 5/8	812 ± 8	31 15/16	515 ± 12	20 1/4	24 ± 5	5/16	283 ± 12	11 1/8
0057950	50	110	12	1/2	465 ± 12	18 5/16	943 ± 10	37 1/8	625 ± 12	24 5/8	25.5 ± 5	1	313 ± 12	12 5/16
0057980	80	176	12	1/2	528 ± 12	20 13/16	1074 ± 10	42 5/16	699 ± 12	27 1/2	26 ± 5	1	365 ± 12	14 3/8

Claw Anchor Stainless Specifications

GALVANIZED Part No.	ANCHOR WEIGHT		RECOMMENDED CHAIN SIZE		A		B		C		D1		D2		E	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
0058901	1	2.2	5	3/16	135 ± 8	5 5/16	292 ± 4	11 1/2	195 ± 8	7 11/16	8 ± 2	5/16	10 ± 2	1/2	106 ± 6	4 9/16
0058902	2	4.4	5	3/16	177 ± 8	6 15/16	358 ± 4	14	240 ± 8	9 7/16	7 ± 2	1/4	9.5 ± 2	3/8	127 ± 6	5
0058905	5	11	5	3/16	230 ± 10	9 1/16	453 ± 5	17 7/8	305 ± 8	12	9 ± 3	1/4	14.5 ± 3	5/8	146 ± 6	5 3/4
0058907	7.5	16.5	6	1/4	267 ± 10	10 1/2	481 ± 5	18 15/16	345 ± 10	13 9/16	12.5 ± 3	1/2	18 ± 3	1 1/16	138 ± 8	5 7/16
0058910	10	22	8	5/16	288 ± 10	11 5/16	540 ± 6	21 1/4	377 ± 10	14 13/16	13 ± 4	1/2	19 ± 4	3/4	165 ± 8	6 1/2
0058915	15	33	8	5/16	332 ± 12	13 1/16	625 ± 6	24 5/8	448 ± 10	17 3/4	15 ± 4	9/16	22 ± 4	1 1/16	203 ± 12	8
0058920	20	44	10	3/8	357 ± 12	14 1/16	661 ± 8	26	465 ± 12	18 5/16	17 ± 5	3/4	25 ± 5	1	220 ± 12	8 11/16
0058930	30	66	10	3/8	405 ± 12	15 15/16	782 ± 8	30 13/16	540 ± 12	21 1/4	18 ± 5	1 1/16	26 ± 5	1	265 ± 12	10 7/16