




WHITE

# Curved Light Bar - 50"

ABOVEWATER LED LIGHT BAR

| PART DESCRIPTION        | WHITE CURVED LED LIGHT BAR 50"                                                                         |
|-------------------------|--------------------------------------------------------------------------------------------------------|
| Part Number             | 60-0474                                                                                                |
| Available Colors        | White (5000 K)                                                                                         |
| Lumens                  | 89,100                                                                                                 |
| Fixture Lumens (White)  | 39,600                                                                                                 |
| Number & Type Of LED    | 100 x 10W White LED                                                                                    |
| LED Power - HICOB Array | Yes                                                                                                    |
| Typical LED Life        | 50,000+ Hours                                                                                          |
| Warranty                | 3 Years                                                                                                |
| User Control Options    | On/Off Switch (Third party supplied)<br>ECLIPSE Command Center<br>EOS-LUX Command Center               |
| Electrical Installation | Simple 2 Wire Connection<br>(3 Wires when used with ECLIPSE Command Center, or EOS-LUX Command Center) |
| Housing Type            | Powder Coated Aluminium Body with Makrolon Lens                                                        |

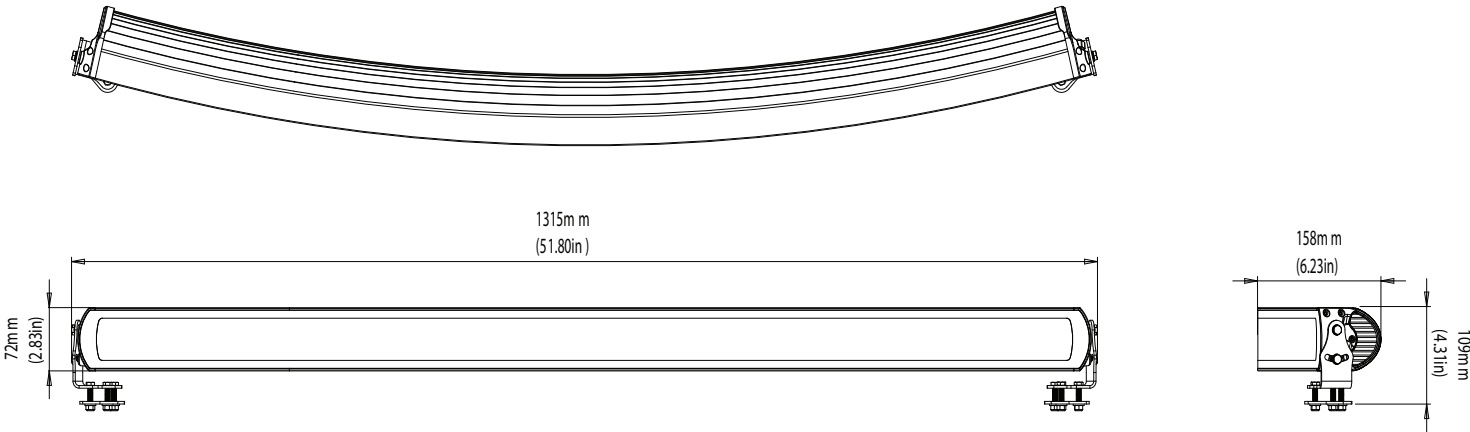



WHITE

Curved Light Bar - 50"

ABOVEWATER LED LIGHT BAR

| TECHNICAL                           |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Driver                              | Internal Driver                                             |
| Supply Voltage Range                | 10.5–31 V DC                                                |
| Max Current Draw 12/24V             | 32 A/16 A                                                   |
| Surge Protection                    | Yes (3,000V)                                                |
| ATRB (Automatic Thermal Roll-Back)  | Yes                                                         |
| Low Voltage Protection              | Automatic Voltage Roll-Back Control And Low Voltage Cut Out |
| Auto Power Control                  | Yes – Intelligent Multi-Channel Power Management            |
| “Soft Start” Electronics Protection | Yes                                                         |
| Reverse Polarity Protection         | Yes                                                         |
| In Rush Current Protection          | Yes                                                         |
| Power Line Noise Suppression        | Yes                                                         |
| Bonding                             | Not Required                                                |
| Electrical Installation             | Simple 2 Wire Connection                                    |

| PHYSICAL                        |                                                 |
|---------------------------------|-------------------------------------------------|
| Beam Angle                      | 9° - 50° Letterbox Beam (Vert - Horiz)          |
| Water Ingress Protection Rating | IP68                                            |
| Light Face Dimensions (LxWxH)   | 131.5 x 7.2 x 15.8 cm (51.8 x 2.8 x 6.2 in)     |
| Housing Type                    | Powder Coated Aluminium Body with Makrolon Lens |
| Light Cable Length              | 50cm (19.7 in)*                                 |
| Weight                          | 6.5 Kg (14.3 Lbs)                               |
| Mechanical Installation         | Stainless Steel Fixing Brackets                 |

\* Extension distance depends on cable type, refer to user manual for further info




WHITE

# Curved Light Bar - 40"

ABOVEWATER LED LIGHT BAR

| PART DESCRIPTION        | WHITE CURVED LED LIGHT BAR 40"                                                                         |
|-------------------------|--------------------------------------------------------------------------------------------------------|
| Part Number             | 60-0473                                                                                                |
| Available Colors        | White (5000 K)                                                                                         |
| Lumens                  | 71,280                                                                                                 |
| Fixture Lumens (White)  | 31,680                                                                                                 |
| Number & Type Of LED    | 80 x 10W White LED                                                                                     |
| LED Power - HICOB Array | Yes                                                                                                    |
| Typical LED Life        | 50,000+ Hours                                                                                          |
| Warranty                | 3 Years                                                                                                |
| User Control Options    | On/Off Switch (Third party supplied)<br>ECLIPSE Command Center<br>EOS-LUX Command Center               |
| Electrical Installation | Simple 2 Wire Connection<br>(3 Wires when used with ECLIPSE Command Center, or EOS-LUX Command Center) |
| Housing Type            | Powder Coated Aluminium Body with Makrolon Lens                                                        |

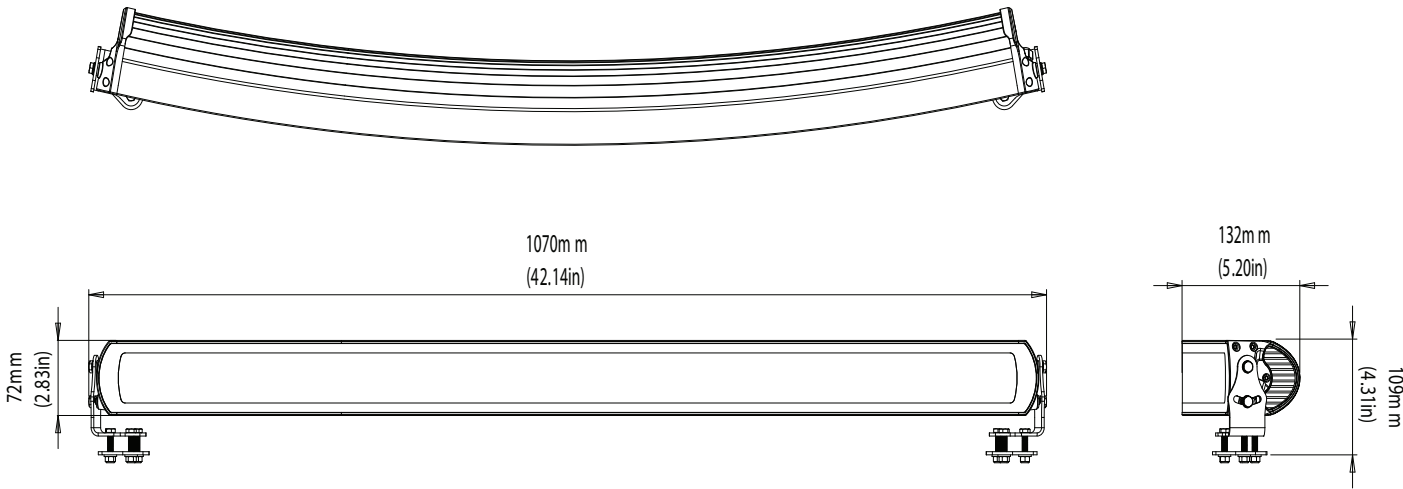

WHITE

Curved Light Bar - 40"

ABOVEWATER LED LIGHT BAR



| TECHNICAL                           |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Driver                              | Internal Driver                                             |
| Supply Voltage Range                | 10.5–31 V DC                                                |
| Max Current Draw 12/24V             | 25.7 A/12.8 A                                               |
| Surge Protection                    | Yes (3,000V)                                                |
| ATRB (Automatic Thermal Roll-Back)  | Yes                                                         |
| Low Voltage Protection              | Automatic Voltage Roll-Back Control And Low Voltage Cut Out |
| Auto Power Control                  | Yes - Intelligent Multi-Channel Power Management            |
| “Soft Start” Electronics Protection | Yes                                                         |
| Reverse Polarity Protection         | Yes                                                         |
| In Rush Current Protection          | Yes                                                         |
| Power Line Noise Suppression        | Yes                                                         |
| Bonding                             | Not Required                                                |
| Electrical Installation             | Simple 2 Wire Connection                                    |

| PHYSICAL                        |                                                 |
|---------------------------------|-------------------------------------------------|
| Beam Angle                      | 9° - 45° Letterbox Beam (Vert - Horiz)          |
| Water Ingress Protection Rating | IP68                                            |
| Light Face Dimensions (LxWxH)   | 107.0 x 7.2 x 13.2 cm (42.1 x 2.8 x 5.2 in)     |
| Housing Type                    | Powder Coated Aluminium Body with Makrolon Lens |
| Light Cable Length              | 50cm (19.7 in)*                                 |
| Weight                          | 5.6 Kg ( 12.3 Lbs)                              |
| Mechanical Installation         | Stainless Steel Fixing Brackets                 |

\* Extension distance depends on cable type, refer to user manual for further info




WHITE

# Curved Light Bar - 30"

ABOVEWATER LED LIGHT BAR

| PART DESCRIPTION        | WHITE CURVED LED LIGHT BAR 30"                                                                         |
|-------------------------|--------------------------------------------------------------------------------------------------------|
| Part Number             | 60-0472                                                                                                |
| Available Colors        | White (5000 K)                                                                                         |
| Lumens                  | 53,460                                                                                                 |
| Fixture Lumens (White)  | 23,760                                                                                                 |
| Number & Type Of LED    | 60 x 10W White LED                                                                                     |
| LED Power - HICOB Array | Yes                                                                                                    |
| Typical LED Life        | 50,000+ Hours                                                                                          |
| Warranty                | 3 Years                                                                                                |
| User Control Options    | On/Off Switch (Third party supplied)<br>ECLIPSE Command Center<br>EOS-LUX Command Center               |
| Electrical Installation | Simple 2 Wire Connection<br>(3 Wires when used with ECLIPSE Command Center, or EOS-LUX Command Center) |
| Housing Type            | Powder Coated Aluminium Body with Makrolon Lens                                                        |

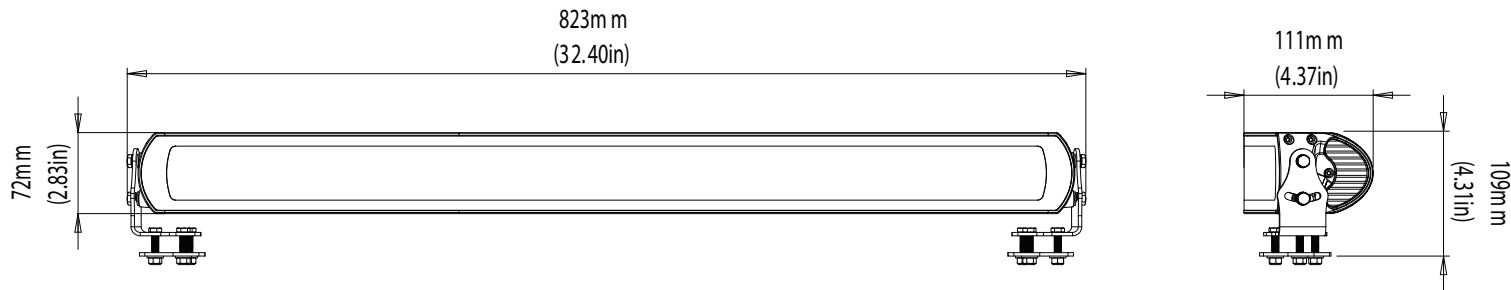

WHITE  
Curved Light Bar - 30"

ABOVEWATER LED LIGHT BAR



| TECHNICAL                           |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Driver                              | Internal Driver                                             |
| Supply Voltage Range                | 10.5–31 V DC                                                |
| Max Current Draw 12/24V             | 19.3 A/9.6 A                                                |
| Surge Protection                    | Yes (3,000V)                                                |
| ATRB (Automatic Thermal Roll-Back)  | Yes                                                         |
| Low Voltage Protection              | Automatic Voltage Roll-Back Control And Low Voltage Cut Out |
| Auto Power Control                  | Yes – Intelligent Multi-Channel Power Management            |
| “Soft Start” Electronics Protection | Yes                                                         |
| Reverse Polarity Protection         | Yes                                                         |
| In Rush Current Protection          | Yes                                                         |
| Power Line Noise Suppression        | Yes                                                         |
| Bonding                             | Not Required                                                |
| Electrical Installation             | Simple 2 Wire Connection                                    |

| PHYSICAL                        |                                                 |
|---------------------------------|-------------------------------------------------|
| Beam Angle                      | 9° - 32° Letterbox Beam (Vert - Horiz)          |
| Water Ingress Protection Rating | IP68                                            |
| Light Face Dimensions (LxWxH)   | 82.3 x 7.2 x 11.1 cm (32.4 x 2.8 x 4.4 in)      |
| Housing Type                    | Powder Coated Aluminium Body with Makrolon Lens |
| Light Cable Length              | 50cm (19.7 in)*                                 |
| Weight                          | 4.0 Kg (8.8 Lbs)                                |
| Mechanical Installation         | Stainless Steel Fixing Brackets                 |

\* Extension distance depends on cable type, refer to user manual for further info





WHITE

# Curved Light Bar - 20"

ABOVEWATER LED LIGHT BAR

| PART DESCRIPTION        | WHITE CURVED LED LIGHT BAR 20"                                                                         |
|-------------------------|--------------------------------------------------------------------------------------------------------|
| Part Number             | 60-0471                                                                                                |
| Available Colors        | White (5000 K)                                                                                         |
| Lumens                  | 33,750                                                                                                 |
| Fixture Lumens (White)  | 15,000                                                                                                 |
| Number & Type Of LED    | 40 x 10W White LED                                                                                     |
| LED Power - HICOB Array | Yes                                                                                                    |
| Typical LED Life        | 50,000+ Hours                                                                                          |
| Warranty                | 3 Years                                                                                                |
| User Control Options    | On/Off Switch (Third party supplied)<br>ECLIPSE Command Center<br>EOS-LUX Command Center               |
| Electrical Installation | Simple 2 Wire Connection<br>(3 Wires when used with ECLIPSE Command Center, or EOS-LUX Command Center) |
| Housing Type            | Powder Coated Aluminium Body with Makrolon Lens                                                        |

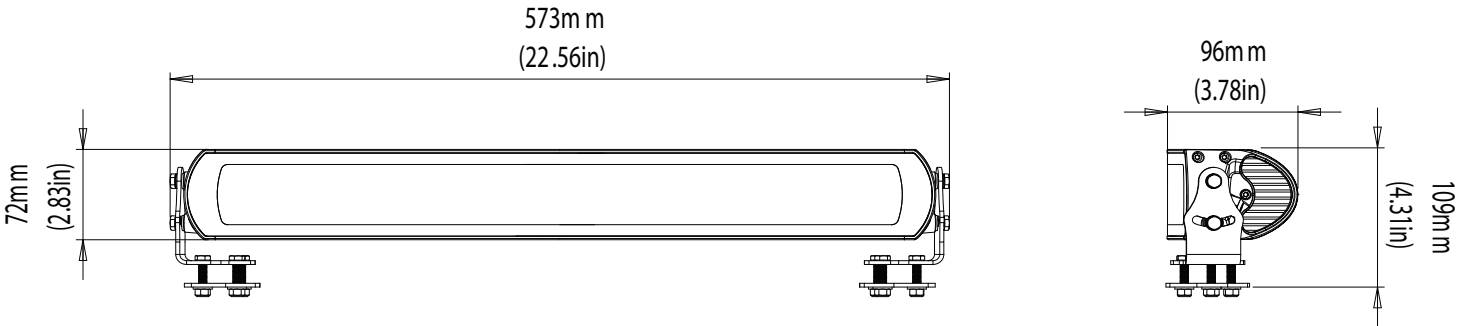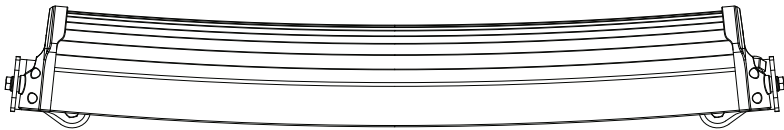

WHITE

Curved Light Bar - 20"

ABOVEWATER LED LIGHT BAR



| TECHNICAL                           |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Driver                              | Internal Driver                                             |
| Supply Voltage Range                | 10.5–31 V DC                                                |
| Max Current Draw 12/24V             | 12.8 A/6.4 A                                                |
| Surge Protection                    | Yes (3,000V)                                                |
| ATRB (Automatic Thermal Roll-Back)  | Yes                                                         |
| Low Voltage Protection              | Automatic Voltage Roll-Back Control And Low Voltage Cut Out |
| Auto Power Control                  | Yes – Intelligent Multi-Channel Power Management            |
| “Soft Start” Electronics Protection | Yes                                                         |
| Reverse Polarity Protection         | Yes                                                         |
| In Rush Current Protection          | Yes                                                         |
| Power Line Noise Suppression        | Yes                                                         |
| Bonding                             | Not Required                                                |
| Electrical Installation             | Simple 2 Wire Connection                                    |

| PHYSICAL                        |                                                 |
|---------------------------------|-------------------------------------------------|
| Beam Angle                      | 9° - 20° Letterbox Beam (Vert - Horiz)          |
| Water Ingress Protection Rating | IP68                                            |
| Light Face Dimensions (LxWxH)   | 57.3 x 7.2 x 9.6 cm (22.6 x 2.8 x 3.8 in)       |
| Housing Type                    | Powder Coated Aluminium Body with Makrolon Lens |
| Light Cable Length              | 50cm (19.7 in)*                                 |
| Weight                          | 3.0 Kg (6.6 Lbs)                                |
| Mechanical Installation         | Stainless Steel Fixing Brackets                 |

\* Extension distance depends on cable type, refer to user manual for further info