




eclipse

ECLIPSE Strip Light - Blue

SL100



PART DESCRIPTION	SL100 ECLIPSE STRIP LIGHT
Part Number	60-0487-1000 - ECLIPSE Strip Light SL100 - Blue (1m) 60-0487-2500 - ECLIPSE Strip Light SL100 - Blue (2.5m) 60-0487-5000 - ECLIPSE Strip Light SL100 - Blue (5m)
Available Colors	Blue
LED Type/Density	60 Blue LEDs Per Meter
Warranty	3 Years
Customer Control Options	On/Off Switch ECLIPSE Command Center
Mechanical Installation	Cut to Length, and Seal the Cut End Before Installation Plug and Play
Electrical Installation	Simple 2 Wire Installation

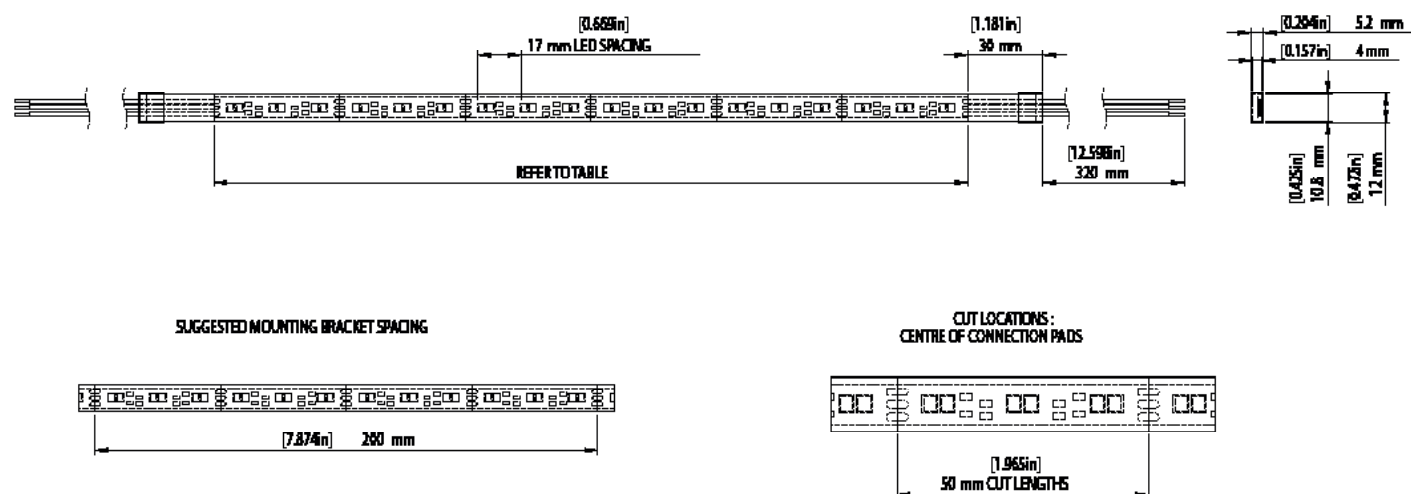

TECHNICAL	
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw Per Meter (12V DC)	0.5A (6W/m)

PHYSICAL	
Ingress Protection	IP68
Cross Section (Strip)	10.8mm x 4.0mm (0.425" x 0.157")
End Cap Dimensions	12.0mm x 5.2mm (0.472" x 0.204")
Lengths Available	1m, 2.5m and 5m 39", 98" and 196" (Cut and Seal)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before Install. Cut in 50mm Steps. Adhesive Backing and Screw Clips.
Weight	68g (2.4 oz)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas / Indoor

ACCESSORIES	
ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497
Stainless Steel Clips (Bag of 25)	60-0510

LIGHTING SYSTEM FUNCTIONALITY (ON/OFF SWITCH)	
On/Off Control	Yes
Dimming Control	No

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)	
From Smart Device/MFD:	
On/Off Control	Yes
Dimming Control	Yes
Zone Control	Yes
From Momentary Switch (Optional):	
On/Off Control	Yes
Dimming Control	Yes




eclipse

ECLIPSE Strip Light - Blue and White

SL100

PART DESCRIPTION	SL100 ECLIPSE STRIP LIGHT
Part Number	60-0489-1000 - ECLIPSE Strip Light SL100 - Blue and White (1m) 60-0489-2500 - ECLIPSE Strip Light SL100 - Blue and White (2.5m) 60-0489-5000 - ECLIPSE Strip Light SL100 - Blue and White (5m)
Available Colors	Blue and White (5000 K)
LED Type/Density	60 Blue LEDs Per Meter / 60 White LEDs Per Meter
Warranty	3 Years
Customer Control Options	On/Off Switch ECLIPSE Command Center
Mechanical Installation	Cut to Length, and Seal the Cut End Before Installation Plug and Play
Electrical Installation	Simple 2 Wire Installation

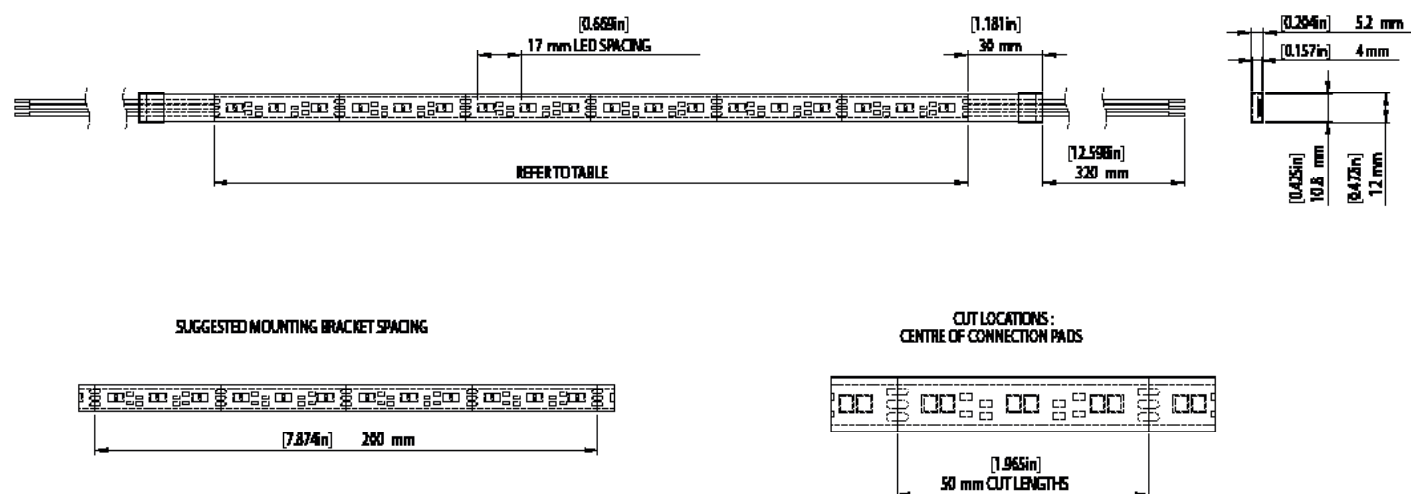

TECHNICAL	
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw Per Meter (12V DC)	0.5A (6W/m)

PHYSICAL	
Ingress Protection	IP68
Cross Section (Strip)	10.8mm x 4.0mm (0.425" x 0.157")
End Cap Dimensions	12.0mm x 5.2mm (0.472" x 0.204")
Lengths Available	1m, 2.5m and 5m 39", 98" and 196" (Cut and Seal)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before Install. Cut in 50mm Steps. Adhesive Backing and Screw Clips.
Weight	68g (2.4 oz)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas / Indoor

ACCESSORIES	
ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497
Stainless Steel Clips (Bag of 25)	60-0510

LIGHTING SYSTEM FUNCTIONALITY (ON/OFF SWITCH)	
On/Off Control	Yes
Switch Between Color Blue and White	Yes
Dimming Control	No

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)	
From Smart Device/MFD:	
On/Off Control	Yes
Switch Between Color Blue and White	Yes
Dimming Control	Yes
Zone Control	Yes
Strobe	Yes
From Momentary Switch (Optional):	
On/Off Control	Yes
Switch Between Color Blue and White	Yes
Dimming Control	Yes




eclipse

ECLIPSE Strip Light - White

SL100



PART DESCRIPTION	SL100 ECLIPSE STRIP LIGHT
Part Number	60-0488-1000 - ECLIPSE Strip Light SL100 - White (1m) 60-0488-2500 - ECLIPSE Strip Light SL100 - White (2.5m) 60-0488-5000 - ECLIPSE Strip Light SL100 - White (5m)
Available Colors	White (5000 K)
LED Type/Density	60 White LEDs Per Meter
Warranty	3 Years
Customer Control Options	On/Off Switch ECLIPSE Command Center
Mechanical Installation	Cut to Length, and Seal the Cut End Before Installation Plug and Play
Electrical Installation	Simple 2 Wire Installation

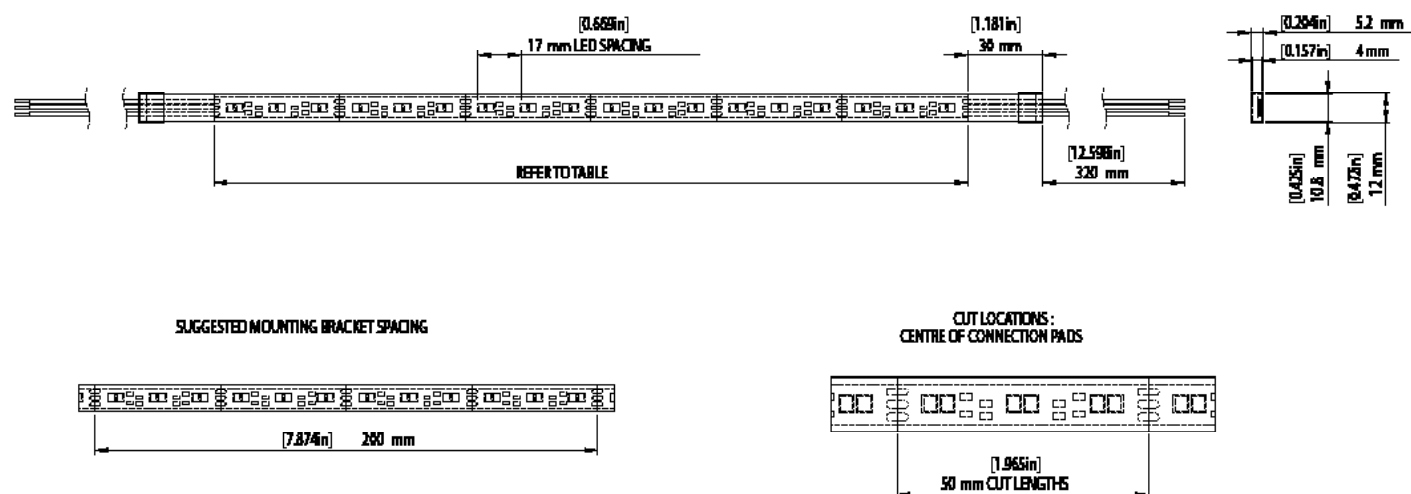

TECHNICAL	
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw Per Meter (12V DC)	0.5A (6W/m)

PHYSICAL	
Ingress Protection	IP68
Cross Section (Strip)	10.8mm x 4.0mm (0.425" x 0.157")
End Cap Dimensions	12.0mm x 5.2mm (0.472" x 0.204")
Lengths Available	1m, 2.5m and 5m 39", 98" and 196" (Cut and Seal)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before Install. Cut in 50mm Steps. Adhesive Backing and Screw Clips.
Weight	68g (2.4 oz)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas / Indoor

ACCESSORIES	
ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497
Stainless Steel Clips (Bag of 25)	60-0510

LIGHTING SYSTEM FUNCTIONALITY (ON/OFF SWITCH)	
On/Off Control	Yes
Dimming Control	No

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)	
From Smart Device/MFD:	
On/Off Control	Yes
Dimming Control	Yes
Zone Control	Yes
From Momentary Switch (Optional):	
On/Off Control	Yes
Dimming Control	Yes




eclipse

ECLIPSE Strip Light - RGB

SL100



PART DESCRIPTION	SL100 RGB ECLIPSE STRIP LIGHT
Part Number	60-0568-1000 - ECLIPSE Strip Light SL100 - RGB (1m) 60-0568-2500 - ECLIPSE Strip Light SL100 - RGB (2.5m) 60-0568-5000 - ECLIPSE Strip Light SL100 - RGB (5m)
Available Colors	RGB
LED Type/Density	60 RGB LEDs Per Meter
Warranty	3 Years
Customer Control Options	ECLIPSE Command Center
Mechanical Installation	Cut to Length, and Seal the Cut End Before Installation Plug and Play
Electrical Installation	Simple 4 Wire Installation

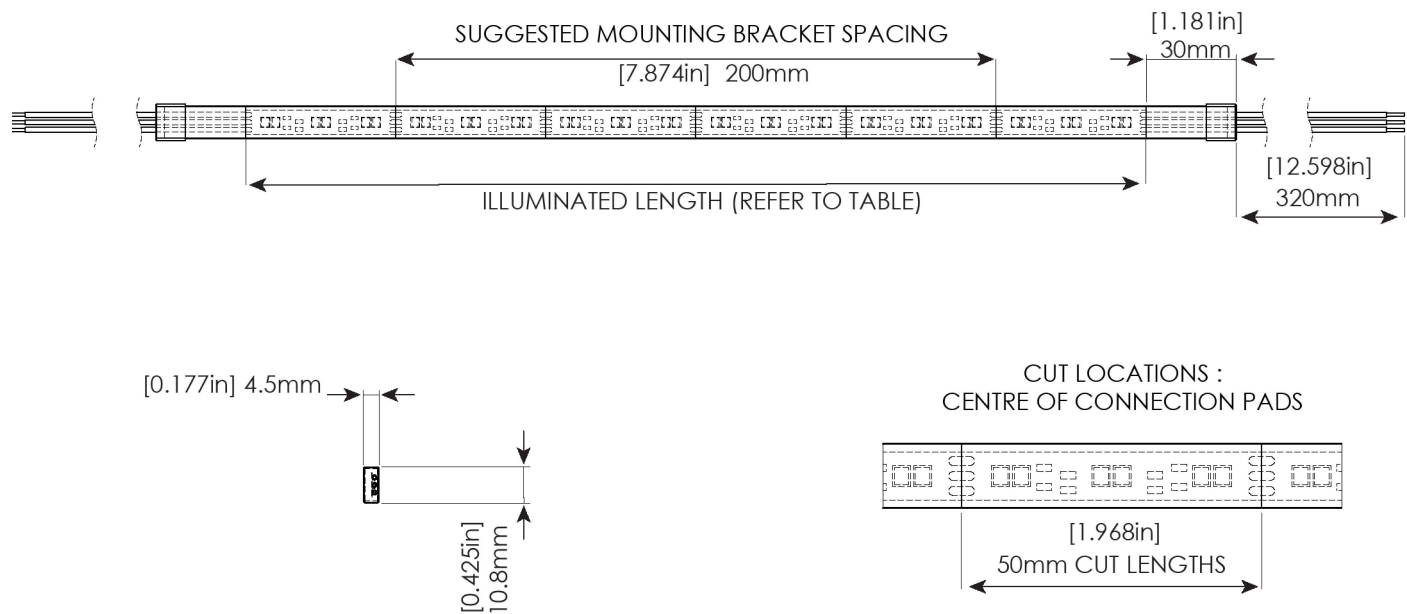

TECHNICAL	
Supply Voltage Range	12V DC Only (10 - 15V DC)
Max Current Draw Per Meter (12V DC)	0.5 A/m (6W/m)

PHYSICAL	
Ingress Protection	IP68
Cross Section (Strip)	10.8mm x 4.0mm (0.425" x 0.157")
End Cap Dimensions	12.0mm x 5.2mm (0.472" x 0.204")
Lengths Available	1m, 2.5m and 5m 39", 98" and 196" (Cut and Seal)
Construction	Fully Encapsulated and Potted
Mechanical Installation	Cut to Length and Seal before Install. Cut in 50mm Steps. Adhesive Backing and Screw Clips.
Weight	68g (2.4 oz)
UV Resistant	Yes
Salt Spray Tested	Yes
Installation Location	Outdoor / Partially Covered Areas / Indoor

ACCESSORIES	
ECLIPSE Command Center	60-0495
Expansion Module (Single Zone)	60-0496
Expansion Module (Double Zone)	60-0497
Stainless Steel Clips (Bag of 25)	60-0510

LIGHTING SYSTEM FUNCTIONALITY (ECLIPSE COMMAND CENTER)	
From Smart Device/MFD:	
On/Off Control	Yes
Dimming Control	Yes
Zone Control	Yes
Select Color Gradient on Wheel	Yes
Sound to Light	Yes
From Momentary Switch (Optional):	
On/Off Control	Yes
Dimming Control	Yes