



551900 ADJUSTABLE TRANSOM SAVER

Adjustable from 28" to 59" to fit most applications.



OWNER'S MANUAL


**For technical help or warranty assistance, please call
+1 757-916-9676 before removing installed product from boat.**

**CUSTOMER MUST RECEIVE THIS MANUAL AT TIME OF SALE
OR AFTER INSTALLATION**

**Rev 2
02MAN551900**

The Panther **Model 551900 Transom Saver** is the most popular and versatile motor support available anywhere. It is adjustable from 28" to 59" to fit most applications, and is made of the finest materials. Securing it to the trailer is accomplished by rotating the insertion shaft 1/2 turn while inserting it into the Transom Insertion Slot on the mounting bracket. If the trailer has a rear keel roller, the Transom Saver may be secured into the vertical adjustment slot of the roller, or an optional Over Roller Bracket Adapter may be purchased.

- The 551900 is easy to assembly with basic tools after viewing the diagram on the next page.
- Once the unit has been assembled, the mounting bracket should be installed on the trailer. There may already be a hole that you can bolt the bracket to. In some cases it may be necessary to drill a hole.
- To use the 551900 Transom Saver, first raise the outboard high enough that it is completely out of the way. Next, slide the insertion shaft into the slot on the trailer. Make sure the outboard is oriented straight ahead, and then slowly lower it until the leading edge of the lower unit rests snugly in the rubber v-block of the Transom Saver. It is important that you do not over do this—putting too much pressure on the rubber v-block could result in damage to both the rubber v-block and your outboard.
- When you have lowered your outboard into the v-block, test the snugness. If you cannot move the Transom Saver at all, try backing off the pressure slightly, but not so much that the rubber v-block can move at all. Experiment until you get it just right. There should not be so much pressure on the v-block that it is caused to compress or deform, but at the same time it should not be able to move when moderate force is applied.
- The bungee cord [not shown] should be put on last to help keep everything secure.

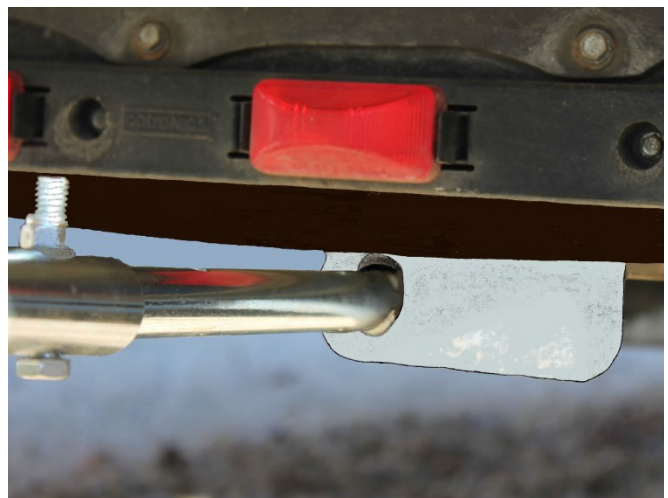


Many of the parts shown here can be ordered at: shop.cmpgroup.net

The most commonly replaced part is the **Rubber V-Block (PID: 9955805)**. Please note: Applying too much pressure to the Rubber V-Block can cause it to fail.

Questions?

Send an email to
info@cmpgroup.net
or call +1 757-916-9676

Item	Description	QTY
1	RUBBER V-BLOCK (9955805)	1
2	1/4" x 2-3/4" HEX BOLT	2
3	V-BLOCK SHAFT	1
4	ADJUSTABLE TUBE	2
5	CENTER TUBE	1
6	INSERTION SHAFT	1
7	MOUNTING BRACKET	1
8	5/16" x 1-1/2" HEX BOLT	2
9	5/16" HEX LOCK NUT	4
10	5/16" x 1-3/4" HEX BOLT	2
11	1/4" HEX LOCK NUT	2

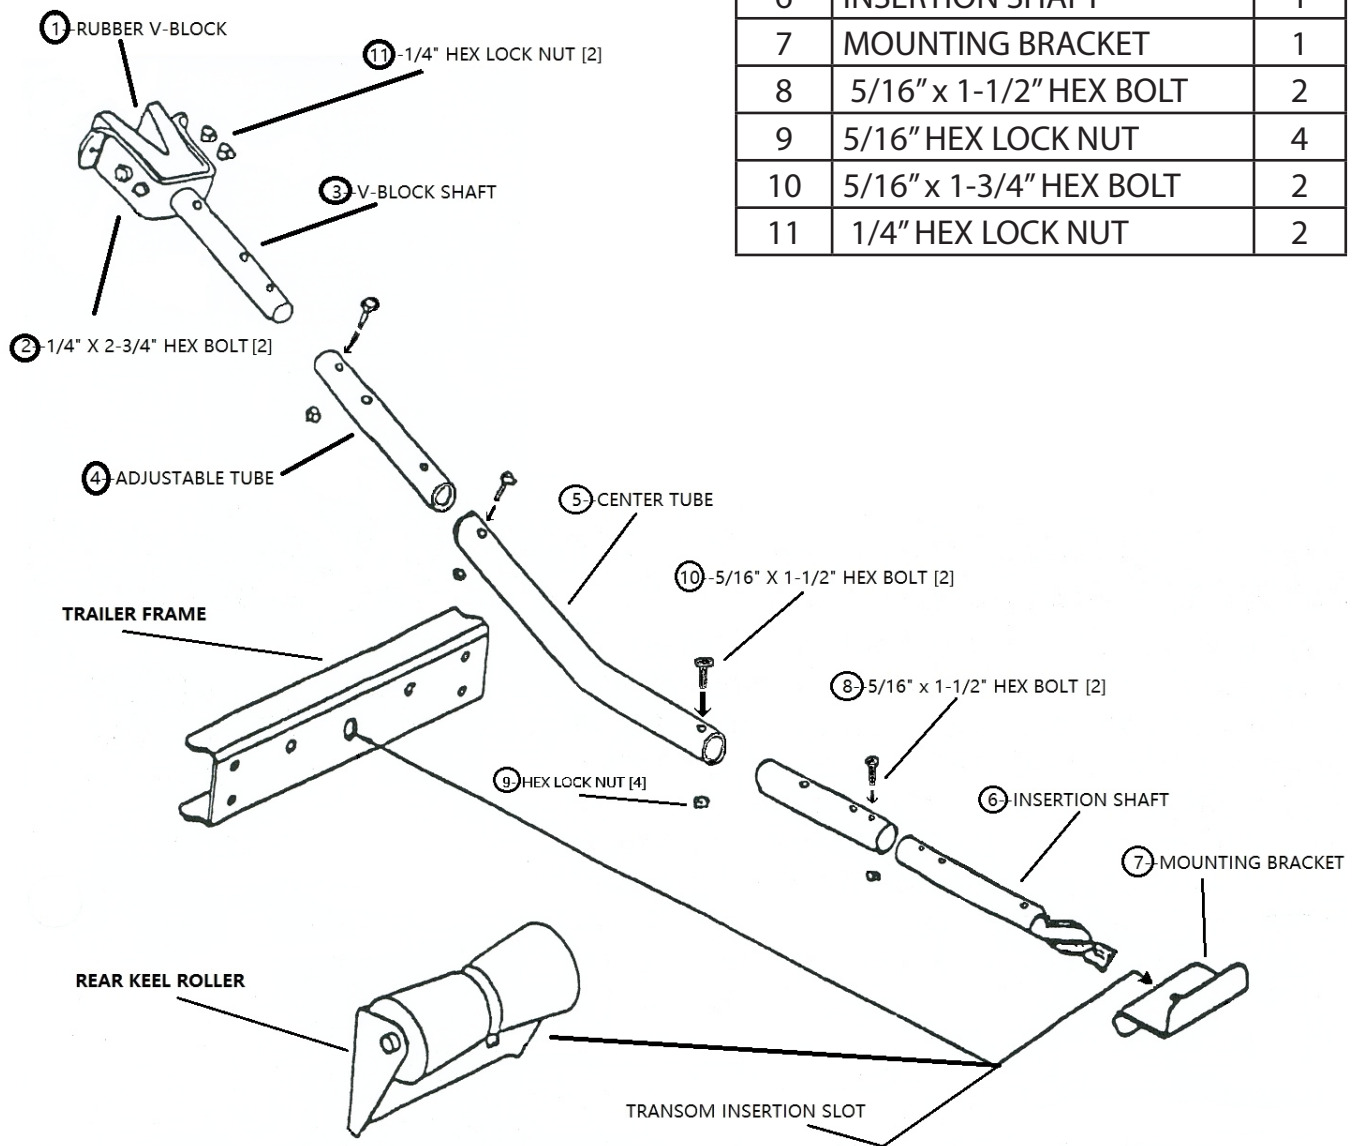

SERVICE AND WARRANTY

Should your unit ever require service, please ***do not return the product to your dealer!*** Instead, call the number below for special instructions on shipping and handling. Be sure to call between 8:00 AM and 4:00 PM (Central Time) Monday through Friday. If the service required is covered by the warranty, it will be repaired or replaced as described below. If the service required is not covered by warranty (such as damage caused from improper trailering or from water intrusion, replacement parts are available for purchase and may be paid for by Visa, MasterCard or Discover.

The warranty coverage on this equipment is limited to the terms set forth below:

CMP Group LTD. warrants this product to be free of defects in material and workmanship for a period of ONE (1) YEAR from the date of original retail purchase. **Positive proof of date of purchase is required for warranty service.** If the service required is covered by warranty, the unit will be repaired or replaced with new or factory rebuilt parts at no charge. The defective components must be returned to the address specified, with shipping charges prepaid. Be sure to include your name, address, telephone number and a copy of the sales receipt showing the date of original retail purchase. All sales receipts are subject to verification.

This warranty does not apply if the unit has been damaged by accident, abuse, misuse, poor installation or misapplication, or if it has been modified from its original condition, or if any serial number has been removed or defaced or altered. **This warranty does not cover any expense to remove or reinstall the unit or any of its components.** If a returned unit is not covered by warranty, the sender will be notified and given an estimate of the charges to repair or replace the unit, together with the return shipping charges.

THIS WARRANTY DOES NOT COVER SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO DAMAGE TO OR REPLACEMENT OF OTHER EQUIPMENT AND PROPERTY. THE WARRANTY AND REMEDIES SET FORTH ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. DUE TO THE SPECIAL AND UNIQUE CONDITIONS THAT MAY EXIST IN EACH APPLICATION, THE MANUFACTURER SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. NO DEALER, AGENT OR EMPLOYEE IS AUTHORIZED TO MAKE ANY MODIFICATION, EXTENSION OR ADDITION TO THIS WARRANTY.

Some states do not allow exclusion of incidental or consequential damages, so the above exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other legal rights, which may vary from state to state.

FOR SERVICE, send an email to info@cmpgroup.net or call +1 757.916.9676

**CMP Group LTD.
7733 Progress Way, Delta, BC Canada V4G 1A3
<https://panthermarineproducts.com/>**

Expand your Panther experience with these CMP Group brands:



Solutions for motor mounting, remote steering, tilt & trim, shallow water anchors, and security systems.



Rod holders, trolling motor supports, and GPS/Sonar mounts.



Auxiliary outboard motor steer systems.



Throttle control for gas powered auxiliary motors.

www.cmpgroup.net

