

Specifications:

Height: MAV - 21.32" (54.15 cm)

MAVM - 20.9" (53.1 cm)

Width: 21.5" (54.6 cm) with Bracket

Depth: 11.7" (29.7 cm) with Bracket

Weight: MAV - 52.0 lbs (22.2 kg)

MAVM - 55.0 lbs (24.0 kg)

Ports: 3/4"-14 NPT

Service Clearance (Top): 10.0" (25.4 cm)


Vacuum Installation Recommended

Maximum Pressure: 15 psi (1.03 bar)

Max Flow Rate: 540 gph (2044 lph)

MA/MAM Model Superseded to VMA/VMAM Model.
See RSL0428 MA-VMA Change Notification
for available assembly crosses.


Dimensions:

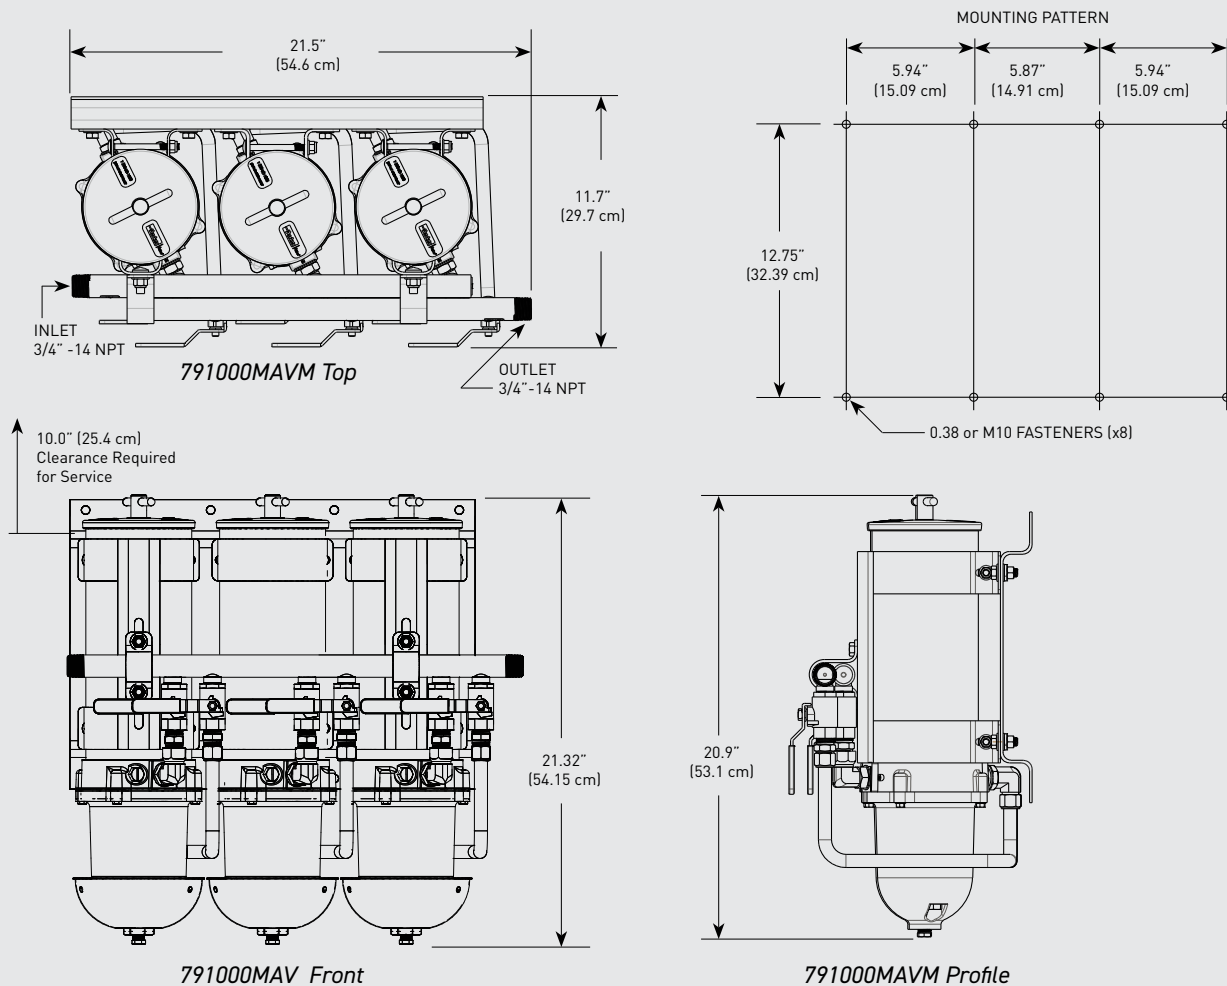


PARTS

Turbine Series - 791000MAV-MAVM


1

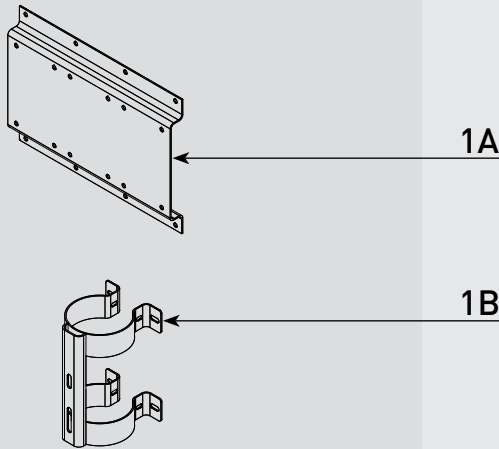


2

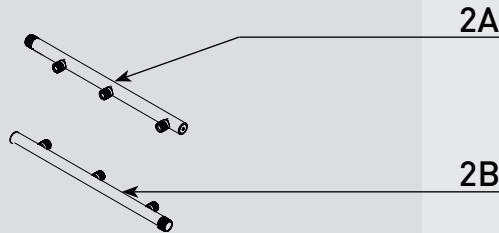

3




4

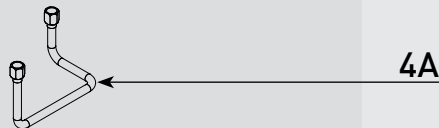

5



6

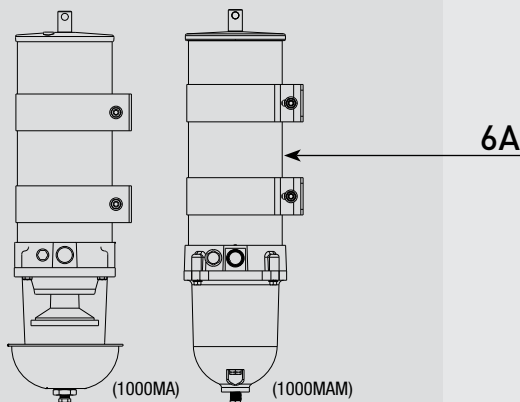

See **RSL0293**
For 1000MA/MAM Parts Breakdown

Part #	Description
1A	Main Mounting Bracket - <i>Contact Technical Support</i>
1B	Manifold Assembly Bracket - <i>Contact Technical Support</i>
2A	19460 Inlet Manifold Tube (3/4"-14 NPT) - (Tan)
2B	19461 Outlet Manifold Tube (3/4"-14 NPT) - (Tan)
3A	RK 11073 Ball Valve Assembly (<i>uses 6</i>)
4A	Manifold tube - <i>Contact Technical Support</i>
5A	U-bracket (<i>uses 2</i>)
6A	Turbine Fuel Filter - 1000MA/MAM Series (<i>Uses 3</i>) See Cutsheet RSL0293 for available Parts and Accessories

Accessories and Parts Available (*Not Shown*)

7A	RK 11-1404	Complete Seal Service Kit - 1000MA/MAM Series Filters (<i>Requires 3</i>)
7B	RK 21069 RK23191	WIF Probe - 1/2"-20 UNF - 2-wire (MA) - Requires 7C * WIF Probe - Stainless Steel - 1/2"-20 UNF - 2-wire (MAM) - Requires 7C *
7C	RK 14329 RK 14321	Water Detection Module - 12 vdc Water Detection Module - 24 vdc
8A		Bowl Gasket - Included in 7A
8B	RK 11-1606-1	MA Bowl Kit (Clear) - Includes 8A, 9B & 9F (Gasket & O-ring only)
8C	RK 11734-03	MAM Bowl Kit (Metal) - Includes 8A, 9A, 9D and 10B
9A	RK 20022	Metal Bowl Plug Kit (MAM) (O-ring Included in 7A)
9B	RK 20126	Plastic Bowl Plug Kit (MA) (O-ring Included in 7A)
9C	RK 11868	Heat Deflector Kit (MA) - Includes 9F
9D		Drain Plug (MAM) - <i>Contact Technical Support</i>
9E	RK 11-1910	Drain Plug Kit (MA) (Gasket & O-ring Included in 7A)
10A	RK 11037A-01	Bowl Ring Kit (For MA Only - White) - Includes 8A & 10B
10B	RK 11542	Cap Screw Bowl Ring Fasteners (set of 4)
11A	2020V2 2020V10 2020V30	1000MA/MAM Replacement Element 2 micron (<i>uses 3</i>) 1000MA/MAM Replacement Element 10 micron (<i>uses 3</i>) 1000MA/MAM Replacement Element 30 micron (<i>uses 3</i>)

* Note: If all 3 units are used simultaneously, one probe or sensor can be used. If units are used as backups, then a probe or sensor should be installed in each bowl. Multiple probes can be wired in parallel to a single detection module.



Online Link
Turbine Series Selector



Online Link
Turbine Series
Replacement Parts Selector