


- Reversible
- Self-priming
- Compact size with exceptional flow rate: 3 GPM (11 LPM)
- Powerful pumps specially designed to be used with oils.

GP-311BKT

GP-311 brass gear pump with a durable 12v DC motor, pump head is brass, gears are bronze, and has stainless steel shaft.

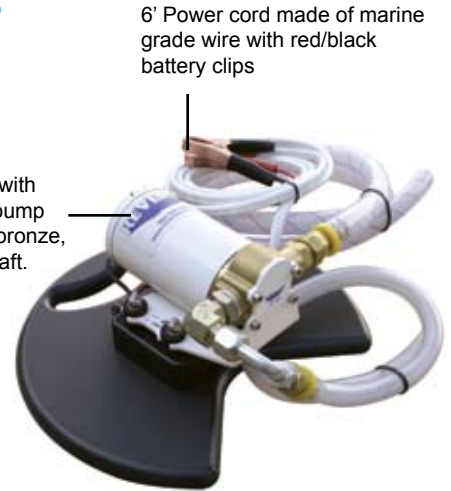


Gear Pump Series

Technical Specification

Ports	3/8" Male JIC
Fuse	10A@12V 5A@24V
Flow Rate	2.1 GPM (8 LPM)
Self priming	5 ft (1.5 m) (wet gears)
Pump body	Brass
Gears	Bronze
Shaft	Stainless Steel
Seal	Fluoroelastomer lip seal
Motor	12V or 24V DC
Weight	311BKT: 7 lbs (3.18 kg) 311P: 6 lbs (2.72 kg)

GP-311P

GP-311 brass gear pump with a durable 12v DC motor, pump head is brass, gears are bronze, and has stainless steel shaft.

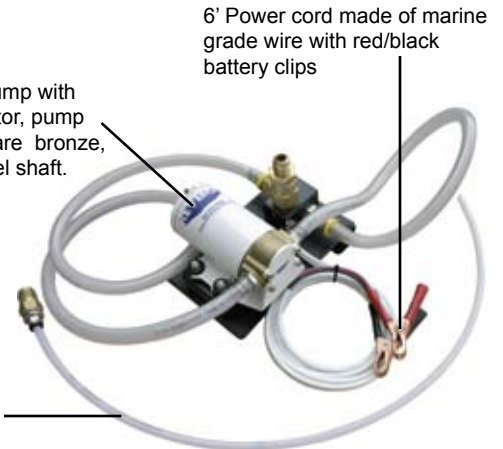

Impeller Pump Series

Technical Specification

Ports	3/4" M Hose & 3/8" FNPT
Amp. Draw (load 20 PSI)	7A@12V 3A@24V
Flow Rate	3 GPM (11.35 LPM)
Self priming	3 ft (0.91m)
Lift	10 ft (3.05 m)
Impeller	Nitrile (Standard) Fluoroelastomer (Optional)
Working Pressure	0-15 psi (0-1.03 bar)
Seal	Nitrile Rubber
Motor	12V or 24V DC
Fuse	15A@12V, 10A@24V
Weight	8 lbs (3.63 kg)

OP-700

King Starboard pump base include connector holders to avoid oil spillage during unit transport.

Special flare to fit into buckets

Hoses are 40" and 60" long. Both equipped with brass adapters.

