

TRAVELLER SYSTEMS Series 25 T-Track




© James Hill



Removable lead block



Ergonomic plunger stop operation

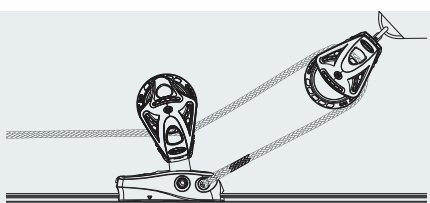

Integrated becket for 2:1 sheet system

- ✓ Low profile and light weight, T-Track is a simple, reliable system for adjustable sheet leads.
- ✓ Composite slides have a removable attachment pin to suit either a Dyneema® link or a shackle.
- ✓ Composite slides have an integrated becket for 2:1 headsail sheet systems, popular on modern sport boats.
- ✓ Composite slides have a spring-loaded push button plunger stop for fast, positive positioning.
- ✓ Stand-up blocks on composite slides provide optimum alignment and low profile lead.
- ✓ The main pin recess in the RC72504 composite slide can accept up to 8mm (5/16") line attached directly to the pin.
- ✓ A convenient all inclusive racing kit is available for sportsboats (RC72540S).
- ▲ RC72537S suitable for headsail sheet leads on boats up to 8m (26ft).
- ▲ RC72533S suitable for headsail sheet leads on boats up to 7m (23ft).
- ⚙️ Toughened, glass fibre reinforced nylon slide.
- ⚙️ Anodised aluminium alloy track.
- ⚙️ Grade 316 stainless steel ring (RC72544).

TRACK FASTENINGS – 5mm (3/16") countersunk fasteners at 100mm (3 15/16") centres. **STOP HOLES** – 25mm (63/64") centres for Racing track, 50mm (1 31/32") on all other tracks.

PRODUCT No.	DESCRIPTION	LENGTH	M.W.L.	B.L.	WEIGHT	LENGTH	M.W.L.	B.L.	WEIGHT
		mm	kg	kg	g	in	lb	lb	oz
RC72537S	Composite slide, Series 55 BB Orbit Block™, stand-up, suits up to 10mm (3/8") rope, plunger stop	102	500	1000	193	4	1100	2200	6.8
RC72540S	Racing Kit, including 2 x 465mm (18 5/16") racing tracks, 2 x composite slides with Series 55 BB Orbit Block™, 4 x track ends, 10 x track bolt insulators	-	500	1000	842	-	1100	2200	29.8



PRODUCT No.	DESCRIPTION	LENGTH mm	M.W.L. kg	B.L. kg	WEIGHT g	LENGTH in	M.W.L. lb	B.L. lb	WEIGHT oz
Slides									
RC72504	Composite slide, removable M4 pin, plunger stop	102	500	1000	107	4	1100	2200	3.8
RC72505	Composite slide, saddle, plunger stop	80	400	800	72	3 5/32	880	1760	2.5
RC72506	Composite slide, saddle	67	400	800	57	2 5/8	880	1760	2
RC72533S	Composite slide, Series 40 AP block, stand-up, suits up to 10mm (7/16") rope, plunger stop	80	400	800	137	3 5/32	880	1760	4.8
RC72536S	Composite slide, Series 40 BB Orbit Block™, stand-up, suits up to 9mm (5/16") rope, plunger stop	102	325	700	152	4	715	1540	5.4
RC72544	Composite spinnaker pole slide ring, plunger stop	102	400	800	215	4	880	1760	7.6
Accessories									
RC7250-INS	Track bolt insulator	-	-	-	3	-	-	-	0.1
RC72581	Track end, plastic	-	-	-	5	-	-	-	0.2
Track - Supplied with RC7250-INS nylon track bolt insulators									
RC7251-0.5A	Racing track, black, 25mm (63/64") stop hole centres	465	-	-	188	18 5/16	-	-	6.6
RC7251-1.0A	Racing track, black, 25mm (63/64") stop hole centres	996	-	-	405	39 3/16	-	-	14.2
RC7251-1.5	Track, black, 50mm (1 31/32") stop hole centres	1496	-	-	631	58 7/8	-	-	22.2
RC7251-2.0	Track, black, 50mm (1 31/32") stop hole centres	1996	-	-	841	78 9/16	-	-	29.7
RC7251-3.0	Track, black, 50mm (1 31/32") stop hole centres	2996	-	-	1263	117 15/16	-	-	44.5
RC7251-6.0	Track, black, 50mm (1 31/32") stop hole centres	5996	-	-	2528	236 1/16	-	-	89.1