

Interior Charging Socket 12/24V


TILE • USB-A / USB-C

SC-TILE-10 Black Bezel
SC-TILE-11 Brushed Stainless Steel Bezel

Technical Information

Input Voltage	12/24V System 10-32V DC			
Input Current Max	6A			
Output Type	12V System		24V System	
	USB-A	USB-C	USB-A	USB-C
	5V~3A, 9V~3A, 12V~3A MAX	5V~3A, 9V~3A, 12V~3A MAX	5V~3A, 9V~3A, 12V~3A MAX	5V~3A, 9V~3A, 12V~3A, 15V~3A, 20V~3A MAX

Standby Draw	< 0.1W	
Cable	18 AWG - Minimum bend rad 15mm	
Certification	CE, FCC, UKCA, C-Tick, ROHS, WEE, UN ECE R10	
Main Charging Protocols	USB-A	USB-C
	QC 3	PD 4 QC 3

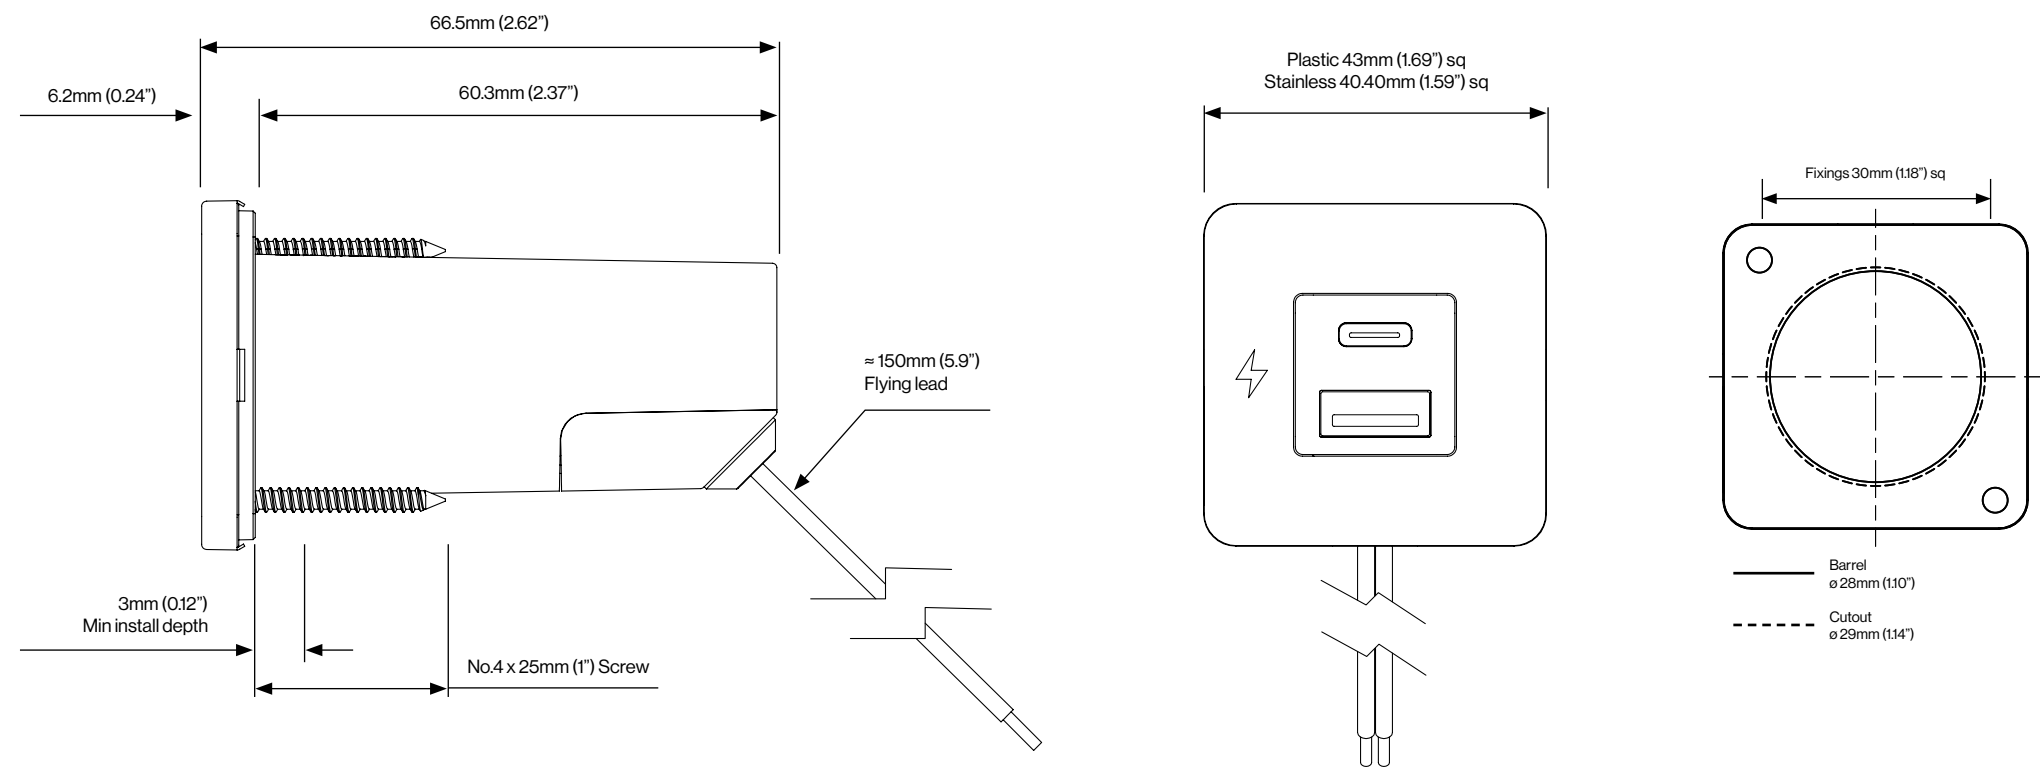

Interior Charging Socket 12/24V


TILE • USB-C / USB-C

SC-TILE-20 Black Bezel
SC-TILE-21 Brushed Stainless Steel Bezel

Technical Information

Input Voltage	12/24V System 10-32V DC	
Input Current Max	6A	
Output Type	12V System	24V System
	USB-C	USB-C
	5V=3A, 9V=3A, 12V=3A MAX	5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A MAX

Standby Draw	< 0.1W
Cable	18 AWG - Minimum bend rad 15mm
Certification	CE, FCC, UKCA, C-Tick, ROHS, WEE, UN ECE R10
Main Charging Protocols	PD 3 QC 4

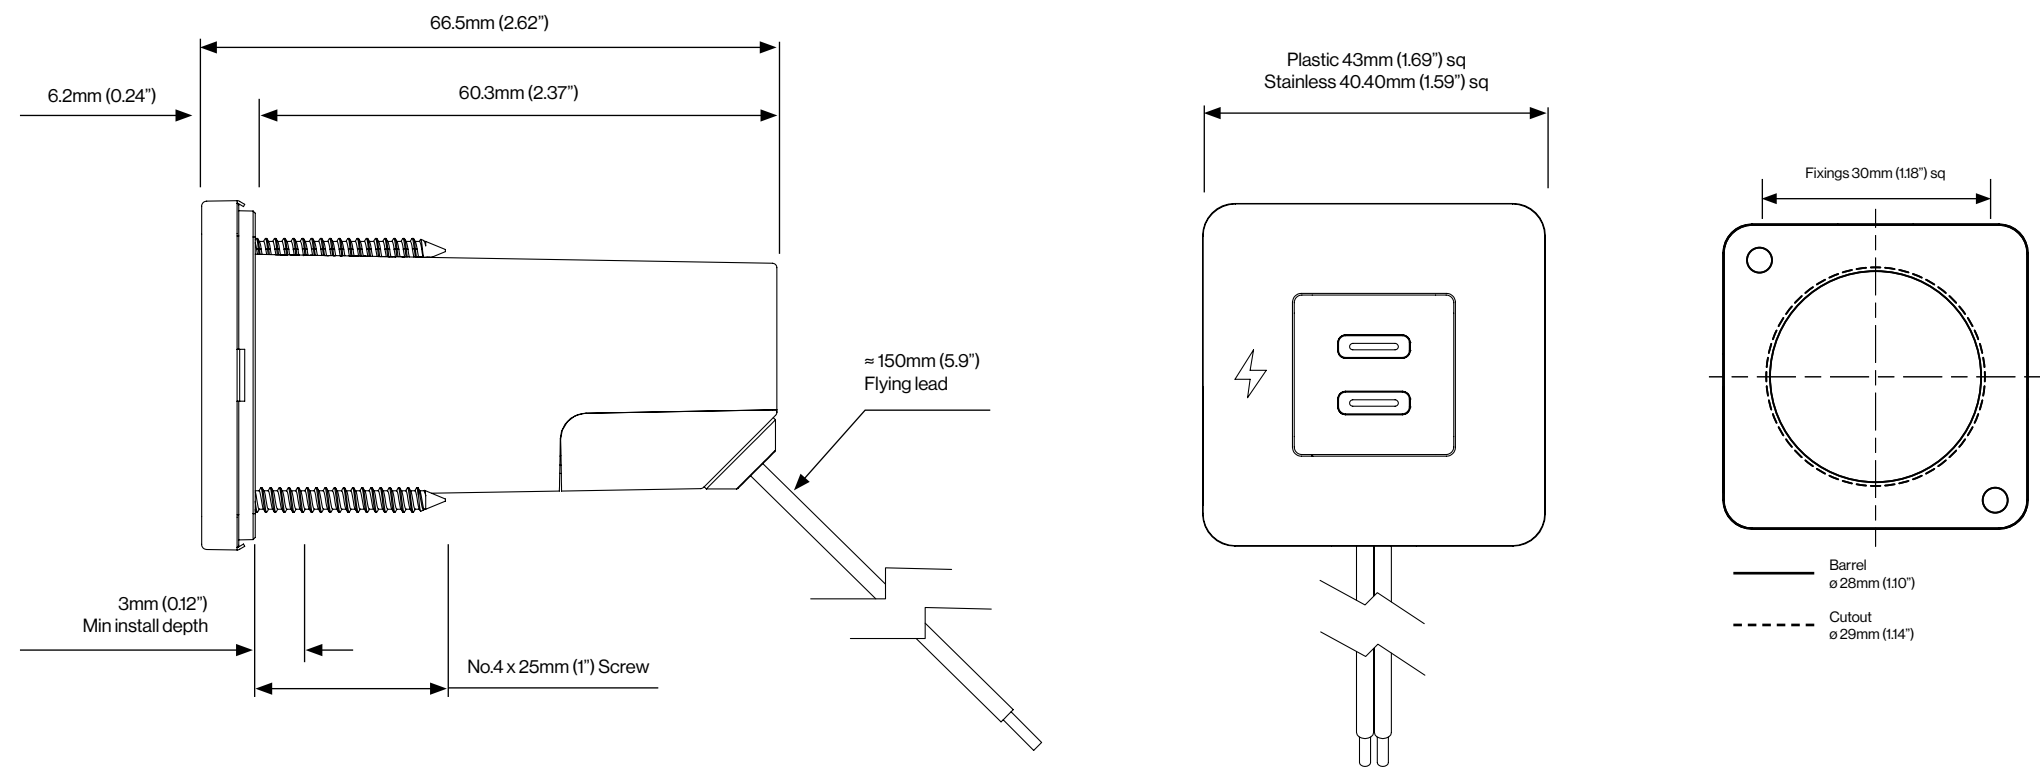

SCANSTRUT.

sales@scanstrut.com • usasales@scanstrut.com

Issue 001 TEC-005361