RV/MARINEPRODUCT DATA SHEETOEM:8050-305-626AFTERMARKET:8050-305-626

APPLICATION

12V DC Oil Change systems including transmission fluids, anti-freeze solutions, low viscosity gear and liquid transfer.

PUMP:

Type:3 Chamber DiaphragmPorts:3/8" NPT-F.Liquid:180 F [82 C] MaxDry-Prime:6 feet with water [1.82 M]Inlet PSI:30 PSI [2.1 Bar] MaxRun Dry:Yes

ELECTRICAL:

12VDC Permanent Magnet, Continuous Duty
Thermal Overload, Automatic Restart
8 feet [2.4m] with alligator clips
7.5 Amp Recommended
30 PSI Internal By-pass



Incorporating SHURflo's advance motor technology that includes thermal overload protection, these pumps are self-priming, easy to install and are extremely versatile-perfect for a variety of uses including winterizing, Oil changing and liquid transfer.

MATERIALS:

Nylon
Buna
Geolast
Stainless Steel

APPROVALS:

Ignition Protection 8846, CE

SHIPPING:

Approx. Net Weight:4 Lbs. [1.8 Kg] eachCarton Quantity:6Approx. Carton Weight:28 Lbs. [12.7 Kg]


Approx. Carton Size: 24"L x 18"W x 6"H [61cm x 46cm x 15cm]

RELATED DOCUMENTS:


Catalog:	MS-030-140
Applications Spec Guide:	MS-020-005
Installation Manual:	911-714
Aftermarket Warranty:	911-1045
Installation Manual:	911-714

Parts Kits


Number	Components	Parts Kits
5a	Valve Assembly	94-391-12
8	Drive Assembly	94-385-42

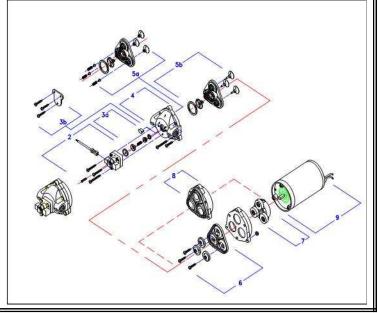

	TYPICAL PERFORMANCE WITH WATER						
PRES	PRESSURE		FLOW				
BAR	PSI	GPM	LPM	AMPS			
0.0	0	1.55	5.86	2.2			
0.7	10	1.45	5.48	2.8			
1.4	20	1.36	5.14	3.5			
2.1	30	1.10	4.16	4.1			
2.8	40	0.15	0.56	4.4			

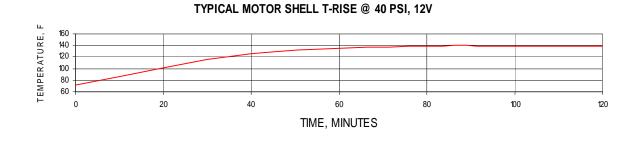

DIMENSIONS [mm]

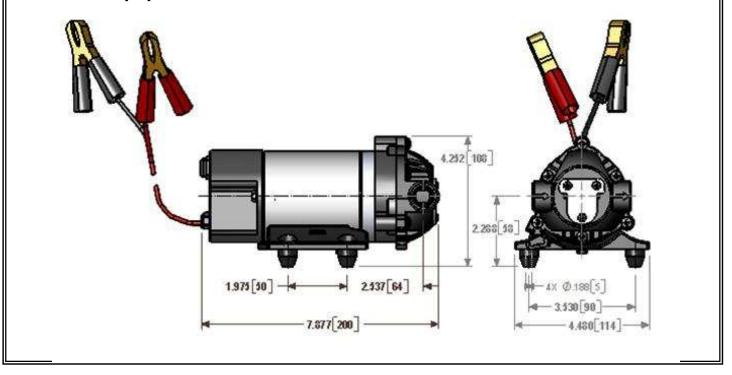



WATER PURIFICATION

3545 Harbor Gateway South, Suite 103, Costa Mesa, CA 92626, (800) 854-3218 www.SHURFLO.com

All Pentair trademarks and logos are owned by Pentair, Inc. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.