



PRODUCT DATA SHEET

Sikaflex®-521 UV

Weathering-resistant STP adhesive sealant with a wide adhesion range

TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)

Chemical base		Silane Terminated Polymer
Colour (CQP001-1)		White, light grey, black
Cure mechanism		Moisture-curing
Density (uncured)	depending on color	1.4 kg/L
Non-sag properties		Good
Application temperature	ambient	5 °C – 40 °C
Skin time (CQP019-1)		30 minutes ^A
Curing speed (CQP049-1)		(see diagram)
Shrinkage (CQP014-1)		2 %
Shore A hardness (CQP023-1 / ISO 48-4)		40
Tensile strength (CQP036-1 / ISO 527)		1.8 MPa
Elongation at break (CQP036-1 / ISO 527)		400 %
Tear propagation resistance (CQP045-1 / ISO 34)		5.5 N/mm
Service temperature (CQP513-1)	4 hours 1 hour	-50 °C – 90 °C 140 °C 150 °C
Shelf life		12 months ^B

CQP = Corporate Quality Procedure

^A) 23 °C / 50 % r. h.

^B) storage below 25 °C

DESCRIPTION

Sikaflex®-521 UV is a weathering-resistant 1-component Silane Terminated Polymer (STP) adhesive / sealant that bonds well to a wide variety of bonding surfaces such as metals, ABS, PC, FRP and wood with usually no need for special treatment. This multipurpose product is suitable for internal and external sealing applications.

PRODUCT BENEFITS

- Ageing and weathering-resistant
- Bonds well to a wide variety of substrates without the need for special pre-treatment
- Isocyanate- and solvent-free
- Can be painted
- Can be sanded
- Low odour

AREAS OF APPLICATION

Sikaflex®-521 UV adheres well to a wide variety of substrates and is suitable for elastic sealing and bonding. Suitable substrate materials include timber, metals, metal primers and paint coatings (2-component systems), ceramic materials and plastics.

This multipurpose product is suitable for internal and external sealing applications. Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-521 UV on materials prone to stress cracking. This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

PRODUCT DATA SHEET

Sikaflex®-521 UV

Version 05.01 (04 - 2023), en_CA

012201205210001000

CURE MECHANISM

Sikaflex®-521 UV cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

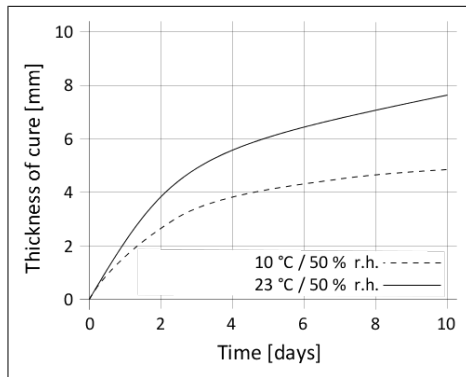


Diagram 1: Curing speed Sikaflex®-521 UV

CHEMICAL RESISTANCE

Sikaflex®-521 UV is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

METHOD OF APPLICATION

Surface Preparation

Surfaces must be clean, dry and free from grease, oil and dust.

Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-Treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

Application

Sikaflex®-521 UV can be applied at temperatures ranging between 5 °C and 40 °C but changes in reactivity and application properties have to be taken into consideration. The optimum temperature for substrate and sealant is between 15 °C and 25 °C.

Sikaflex®-521 UV can be applied with hand, pneumatic or electric driven piston guns as well as pump equipment. For advice on selecting and setting up a suitable pump system, contact Sika Canada.

Tooling and finishing

Tooling and finishing must be carried out within the skin time of the sealant. It is recommended using Sika® Tooling Agent N. Other finishing agents must be tested for suitability and compatibility prior the use.

Removal

Uncured Sikaflex®-521 UV can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from Sika Canada.

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika Pre-treatment Chart
Silane Terminated Polymer
- General Guidelines
Bonding and Sealing with Sikaflex® and SikaTack®

PACKAGING INFORMATION

Cartridge	300 mL
Unipack	400 mL 600 mL

BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

User must read the most recent corresponding Safety Data Sheets (SDS) before using any products. The SDS provides information and advice on the safe handling, storage and disposal of chemical products and contains physical, ecological, toxicological and other safety-related data.

DISCLAIMER

The information, and in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any recommendations, or from any other advice offered. The information contained herein does not relieve the user of the products from testing them for the intended application and purpose. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request or may be downloaded from our website at: www.sika.ca

PRODUCT DATA SHEET

Sikaflex®-521 UV
Version 05.01 (04 - 2023), en_CA
012201205210001000

Sika Canada Inc.
Head Office
601, avenue Delmar
Pointe-Claire, Quebec
H9R 4A9
1-800-933-SIKA
www.sika.ca

