




# TRIDENT MARINE®

## HD & XHD WATER HOSE (SAE J20R3)

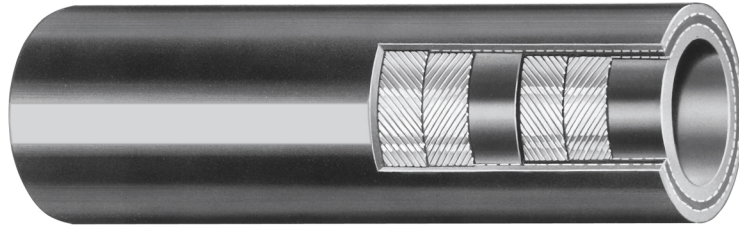

### # 132 Series

**Trident** Cost effective, Hi Temp, EPDM rubber, polyester reinforced and exceeds SAE J20R3. The 132 series is resistant to coolants, ozone, cold & heat; and serve a variety of boat and plant pressurized applications (water & air delivery).

#### Specifications

**Construction:**

**Tube & Cover:**  
EDPM Rubber

**Color:** Black

**Reinforcement:**  
Polyester  
reinforcement

**Temperature Range:**  
-40F-212°F (-40°C-100°C)

**Coils:**  
700' (213.4m)

**Boxed :**  
50' (15.24m)

Part Number	ID		OD		Working Pressure		Weight		Bend Radius	
	in.	mm.	in.	mm.	Psi	Bar	Lb./50 ft.	Kg/m	in	mm
132-0140	1/4	6.4	.5	12.7	200	13.8	4.5	0.13	.75	19.1
132-0560	5/6	7.9	.594	15.1	200	13.8	6	0.18	1.375	34.9
132-0380	3/8	9.5	.656	16.7	200	13.8	7	0.21	1.25	31.8
132-0120	1/2	12.7	.813	20.7	200	13.8	10	0.30	2	50.8
132-0580	5/8	15.9	.969	24.6	200	13.8	12	0.36	2.5	63.5
132-0340	3/4	19.1	1.062	27	200	13.8	18	0.52	3.275	83.2
132-1000	1	25.4	1.406	35.7	200	13.8	22	0.66	4.375	111

\*Burst Pressure is 4 x Working Pressure