






Before fitting, release the antenna and then turn off the PLB3 by pressing the TEST/OFF Key until the LED flashes red twice and release.

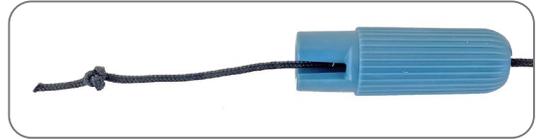


- 1 Thread the cord through the end of antenna rewind tool.
- 2 Tie a figure of eight knot in the end so the cord cannot come out.

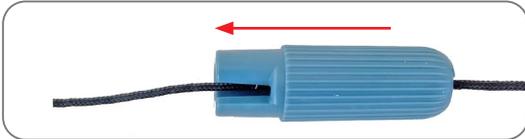

- 3 Thread the cord through (1) the activation 'armed' cover, and (2) the activation slider. Tie one figure of eight knot 20cm from the end of cord.

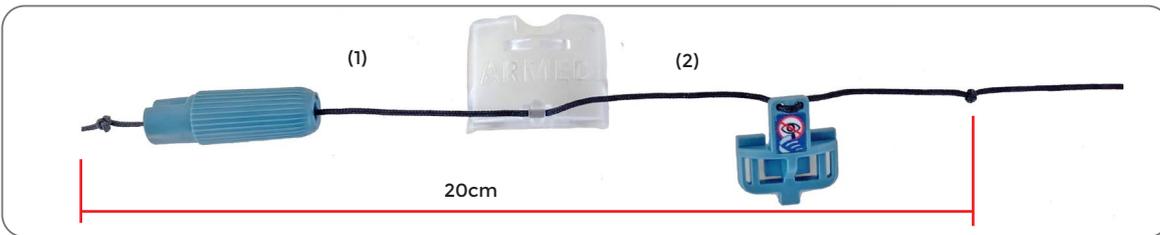


- 4 Tie another figure of eight knot 10cm from the first knot.
- 5 Thread the cord through the slot on back of the PLB unit.

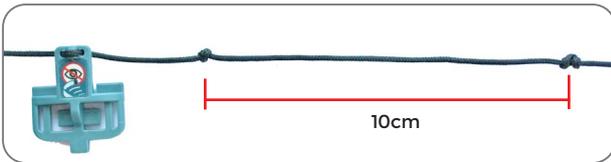

- 6 Tie another figure of eight knot in the end to stop the cord coming back through.
- 7 Take the activation slider and thread down through the inner slot then back up through the outer slot.



- 8 Leave 5cm of tail and then run the ribbon from inner slot underneath the activation slider.
- 9 Insert the antenna into the top and place the rewind tool into the antenna end. Wind the antenna anti-clockwise with the tool until the antenna is fully coiled. Do not remove the tool until the slider is in place

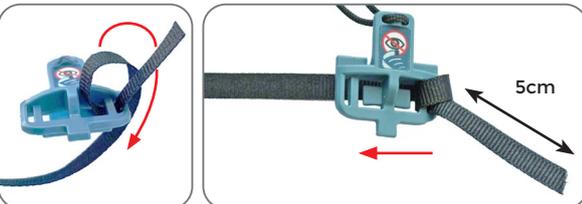

- 10 Place the activation slider onto the PLB unit. Slide from left to right. Check the cord is not tangled up in the slider.
- 11 Move the Red Arming Slide up, so the activation slider does not come off when fitting the PLB unit to the lifejacket.



- 12 Slide the MOB 2 clip to the PLD attachment point by the whistle and oral tube.



- 13 Clip the PLB 3 into place.



- 14 Locate the loop mid way up on the Deckvest.

Pass the activation ribbon through the loop and tie a thumb knot in it. Check the length from the bottom of the loop to the activation slider is 40mm and tighten the knot.



- 15 Attach the cord to the loop with a thumb knot.

This is to ensure the unit is always attached to the Deckvest.

Leave as much length as possible on the cord to allow room for the bladder inflation.



- 16 Move the Red Arming Slide down to unlock and place the plastic activation cover over the unit.

The Deckvest can now be re-packed.

